CARBOCORE
MINERALS & POLYMERS

TECHNICAL DATA SHEET

TDS-CC-TALC-90 · Rev. 01 · 20 Oct 2026

MINERALS & POLYMERS

INDUSTRIAL MINERALS / TALC

CC-Talc 90

Natural talc powder

Hydrated magnesium silicate

$Mg_3Si_4O_{10}(OH)_2$ · CAS 14807-96-6 · HS code 2526.20 · Origin: Egypt

Chemically inert, lamellar (platy) mineral.

SiO_2 CONTENT	MgO CONTENT	BRIGHTNESS R(Y)	MOISTURE
60 – 62 %	31 – 33 %	90 ± 1	≤ 0.2 %

01 PARTICLE SIZE DISTRIBUTION

PARAMETER	SIEVE RESIDUE · ISO 787/7
Residue on 200 µm sieve	**≤ 0.1 %**
Residue on 150 µm sieve	**0.4 – 2 %**
Residue on 100 µm sieve	**19 %**

Values are reported by the stated method; results from different methods are not interchangeable.

Cumulative passing vs. sieve aperture · ISO 787/7

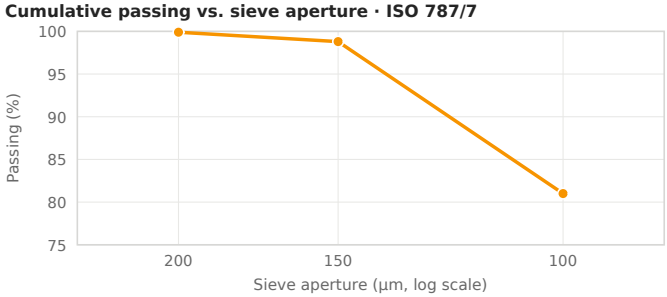

02 CHEMICAL & MINERALOGICAL ANALYSIS

Typical composition · mass % unless stated

SiO_2	**60 – 62**
MgO	**31 – 33**
Al_2O_3	**0.3 – 0.5**
Fe_2O_3	**0.1 – 0.2**
CaO	**0.14 – 0.3**
TiO_2	**< 0.01**
$Na_2O + K_2O$	**< 0.02**
L.O.I. (1000 °C)	**4.5 – 5.5**
Talc content (XRD)	**≥ 95**
Crystalline silica / quartz (XRD)	**≤ 0.5**
Asbestos (XRD + PLM)	**Not detected**

03 PHYSICAL PROPERTIES

Loose bulk density (g/cm³)	**0.8**
Tapped density (g/cm³)	**1.25**
Oil absorption (ISO 787/5) (g/100 g)	**25 ± 1**
Specific surface area, BET (m²/g)	**1.2**
Density (ISO 787/10) (g/cm³)	**2.7**
Hardness (Mohs)	**1**
pH value (ISO 787/9)	**8**
Moisture (ISO 787/2)	**≤ 0.2 %**
Refractive index	**1.57 – 1.59**

04 OPTICAL PROPERTIES

Color (ELREPHO)

Brightness R(Y)	**90 ± 1**
CIE L*	**95.5 ± 1**
CIE a*	**-0.21**
CIE b*	**1.66**
Yellowness Index (DIN 6167)	**1.4 – 1.7**

PACKING 25 kg PP/paper bags or 1,000 kg jumbo bags (FIBC) · Store dry in sealed bags

Values are typical and given for guidance only; they do not constitute a specification.

Refer to the SDS for safe handling. This sheet is not a batch certificate of analysis.

info@carbocoregcc.com · +20 128 566 8999 **www.carbocoregcc.com**

HEAD OFFICE / 99 El-Thawra St., Heliopolis, Cairo, Egypt