CARBOCORE
MINERALS & POLYMERS

TECHNICAL DATA SHEET

TDS-CC8T-P / REV. 06 / 20 OCT 2026

MINERALS & POLYMERS

SPECIALTY COATED / GCC

CC8T-P

Surface-treated calcium carbonate

HIGH-PURITY LIMESTONE / MINYA, EGYPT

PRODUCTION PLANT / CARBOCORE - MINYA, EGYPT

Natural, very fine calcium carbonate with a high-level stearic acid coating for filler masterbatch; ground from high-purity, very white Minya limestone.

$CaCO_3$ CONTENT	MEDIAN · d50	TOP CUT · d97	BRIGHTNESS R(Y)
≥ 99.60 %	2.0 µm	8 µm	≥ 97 %

01 PARTICLE SIZE DISTRIBUTION

Malvern Mastersizer 3000

LASER DIFFRACTION

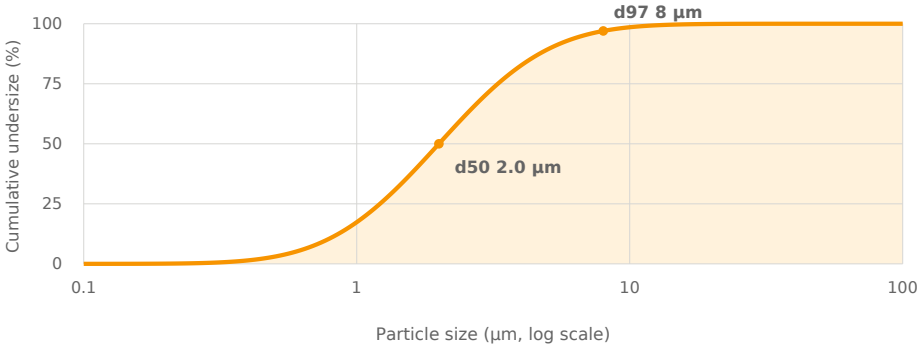

Illustrative curve based on nominal d50 and d97; not a measured trace. Tolerances and < 2 µm values are listed separately.

PARTICLE-SIZE PARAMETERS

Median · d50
2.0 ± 0.2 µm

Top cut · d97
8 ± 0.5 µm

Particles < 2 µm
52 ± 3 %

45 µm sieve residue
≤ 0.01 %

Sieve method: ISO 787/7

02 CHEMICAL ANALYSIS

Raw material before coating · mass %

$CaCO_3$	≥ 99.60 %
CaO	≥ 55.80 %
MgO	≤ 0.15 %
Fe_2O_3	≤ 0.01 %
Al_2O_3	≤ 0.03 %
SiO_2	≤ 0.05 %
HCl insoluble	≤ 0.15 %
Loss on ignition (1000 °C)	43.95 %
$MgCO_3$	≤ 0.31 %
Cr_2O_3	≤ 4 ppm

03 PHYSICAL PROPERTIES

Product characteristics

Loose bulk density	0.70 g/cm³
True specific gravity ISO 787/10	2.67 g/cm³
Moisture, ex works ISO 787/2	≤ 0.15 %
pH ISO 787/9	≤ 9.0
Oil absorption Before coating · ISO 787/5	20 ± 0.5 g/100 g
DOP absorption Before coating · ISO 787/5	32 ± 0.5 g/100 g
Hardness · Mohs	3.0
Refractive index	1.59
Stearic acid	8.5 ± 0.5 kg/t

04 OPTICAL PROPERTIES

Brightness & colour

Brightness R(Y) C/2° · DIN 53163	≥ 97 %
Yellowness index ASTM E313	≤ 2.0

APPLICATIONS

Polyolefins: High-load filler masterbatch for blown & cast film, raffia; **Plasticised PVC:** Calendered sheets, cables, artificial leather.

PACKAGING

25 kg bags or 1 t big bags. Store sealed and dry. Refer to SDS. Industrial use only; not for pharmaceutical or medicinal use.

The information in this Technical Data Sheet relates only to the specific material designated herein and does not relate to its use in combination with any other material or in any process. Recipients of this information must exercise their own judgement as to the appropriateness of its use, and it is the user's responsibility to assess the material's suitability for a particular purpose prior to such use. Values are typical and subject to normal production tolerances.

info@carbocoregcc.com
+20 128 566 8999
HEAD OFFICE / 99 El-Thawra St. Masr Elgedida, Cairo, Egypt